


Features

- 40A Contact Change-over Capacity
- Installation and use of Screw
- With opening and Dust-Proof Type

Power Relay

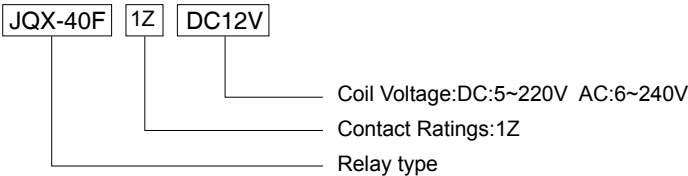

JQX-40F 1Z

Contact Ratings

Contact Ratings	1Z,1H,1D
Contact Resistance	100MΩ (1A 6VDC)
Contact Material	AgCdO
Contact Capacity	40A,50A 250VAC/30VDC

Specification


Insulation Resistance	1000MΩ .500VDC
Dielectric Strength	BCC 2000V 1min
	BOC 1200V 1min
Operate Time	25ms/25ms
Terminal Type	Screw

Coil Ratings

Nominal Coil Power	DC:2.0W AC:2.5VA
--------------------	------------------


Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ± 10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ± 10%
6	4.8	0.60	20	6	4.8	1.80	14.4
12	9.6	1.20	65	12	9.60	3.60	57
24	19.2	2.40	320	24	19.20	7.20	250
48	38.4	4.80	1280	48	38.40	14.4	921
60	48.0	6.0	1440	110/120	88.00	36.0	5000
110	88.0	11.0	6050	220/240	176.00	72.0	19600/25040



JQX-40F 1Z

Dimension.Bottom View

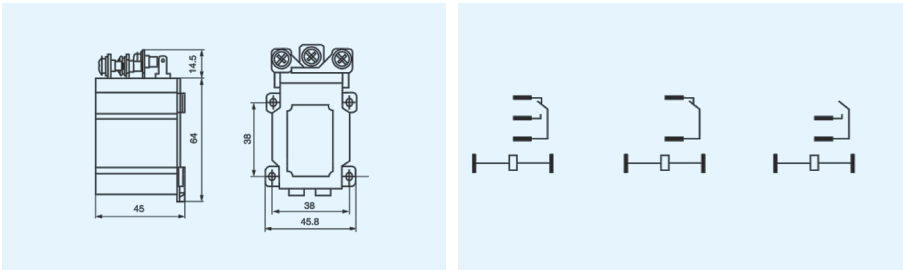

Reference Data

